


ECT010 SINGLE CHANNEL TTL/CMOS DATA OPTICAL LINK

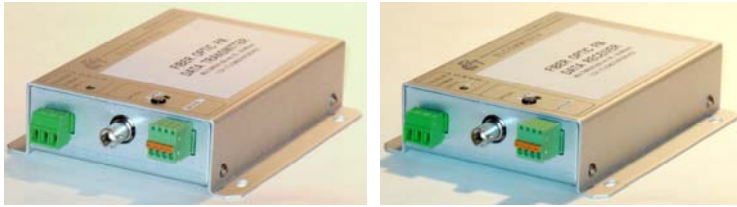

FEATURES

- ❑ High Speed Data Transmission, DC - 26 Mb/sec
- ❑ Multimode and Singlemode Versions
- ❑ Isolates EMI, RFI, Ground Loops
- ❑ Surface Mount Technology
- ❑ Power and Signal Status Indicators
- ❑ 12V AC/DC or 24VAC Power Supply

ECT010 system provides single channel high performance unidirectional link for transmitting TTL data signals over a fiber optic cable. The system features quality transmission of data signals with data rates DC – 26 Mb/sec. ECT010 utilizes high-speed frequency modulation and very low noise transmission technology to assure high accuracy and stability.

Operating Wavelength	850 nm	1300 nm	1310/1550nm
Optical Core Diameter	50μ/62.5μ		8/10μ
Optical Power Source	VCSEL	LED	Laser
Optical Power Output*	-3 dBm	-14 dBm	-5 dBm
Receiver Sensitivity	-34 dBm	-37 dBm	-37 dBm
Optical Connectors	ST, SC		ST, SC, FC

** with +/- 1 dBm variation; higher power laser sources are available per special request.*

ORDERING INFORMATION

010E-DUN-XYZ

- E = M for multimode
 = S for single mode 1310nm
 = M(13) for multimode 1300nm
 = S(15) for single mode 1550nm
- U = T for transmitter
 = R for receiver
- N = 4 for 4 channel rack card
- X = M for standalone module
 = C for rack card*
- Y = 1 number of fibers for standalone module
 = 2, 4 number of fibers for rack card
- Z = ST, SC, FC for optical connectors

Channel Capacity	1Ch. - for standalone module 4Ch. - for rack card
Data Interface	TTL, CMOS
Data Rate	DC – 26 Mb/sec
Data Input Impedance	10K unbalanced
Power Requirements:	
Module	11 - 14 VAC/VDC @ 200 mA 21 - 27 VAC @ 150 mA
Card	11 - 14 VDC @ 400 mA
Operating Temperature	-30°C to +70°C (-22°F to +158°F)
Dimensions:	
Module	4.17"(106mm) x 3.65"(93mm) x 1.1"(28mm)
Card (w/o connectors)	11.6"(270mm) x 5.2"(132mm) x 1.05"(27mm)
Card (with connectors)	12.5"(318mm) x 5.2"(133mm) x 1.05"(27mm)

**compatible with USR type chassis*



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235
 Tel (718) 743-2869 • Fax (718)648-3642 • E-mail sales@elcommtech.com
<http://www.elcommtech.com>