

## Specifications

### Video Performance\*

|                        |                      |
|------------------------|----------------------|
| Video Output Impedance | 75 ohm (unbalanced)  |
| Video Output Voltage   | 1V p (+1/-3 dB)      |
| Video Connector        | BNC                  |
| Frequency Response     | 10 Hz to 7 MHz @ 3dB |

|                                     |                     |
|-------------------------------------|---------------------|
| Signal to Noise Ratio               | 62 dB as per RS250C |
| Differential Gain (-20°C to +70°C)  | <4%                 |
| Differential Gain (-30°C to +85°C)  | <7%                 |
| Differential Phase (-20°C to +70°C) | <4°                 |
| Differential Phase (-30°C to +85°C) | <7°                 |
| Field Tilt                          | <2%                 |
| Luminance                           |                     |
| Non-Linearity (-20°C to +70°C)      | <4%                 |
| Luminance                           |                     |
| Non-Linearity (-30°C to +85°C)      | <7%                 |

### Optical Performance

|                             |                                     |
|-----------------------------|-------------------------------------|
| Single mode - Core Diameter | 8 - 10u                             |
| Optical Connector           | ST, FC or SC                        |
| Receiving Wavelength        | 1310 nm                             |
| Receiver Sensitivity        | - 36 dBm                            |
| Transmitting Light Source   | Laser 1550 nm                       |
| Optical Power Output        | -8 dBm (+/- 2 dBm -30 °C to +85 °C) |

### Data Interface

|                |                                |
|----------------|--------------------------------|
| Data Interface | RS-422 Bi-directional – 4 wire |
| Data Rate*     | Up to 200Kb/s                  |

\* *measured with 144S-VT/DX-M1ST or 144SR-VT/DX-M1ST unit  
as per RS-250C @ 100m for multimode and 1km for single mode optical cable.*

|                       |                                     |
|-----------------------|-------------------------------------|
| Operating Temperature | -30 °C to +85 °C                    |
| Dimensions            | 170mm(L) x 126mm(W) x 34mm(D)       |
| Power Requirements    | 12V AC or DC @ 300mA; 24VAC @ 200mA |

## **144S-VR/DX-M1**

### **Fiber Optic Video Receiver & 2Ch. RS-422 Data Transceiver**

**Singlemode**

**Single Fiber Operation**

Elcommtech Corp.  
2620 Ocean Parkway, Suite 4H  
Brooklyn NY 11235  
(718)743-2869 Fax: (718)648-3642  
E-Mail: [sales@elcommtech.com](mailto:sales@elcommtech.com)  
Internet: <http://www.elcommtech.com>

## Introduction :

The Elcommtech 144S-VR/DX-M1 forms part of a singlemode, single fiber video and data fiber optic transmission system. Using frequency modulation and operating as a dual window 1310/1550nm single fiber unit, the 144S-VR/DX-M1 provides the following facilities in a 170mm x 126mm x 34mm free standing module.

Optical Receiver for : Composite Video signal & 2x RS-422 Data Channels


Optical Transmitter for : 2x RS-422 Data Channels

**Indicators** :- All indicators are located on the top of the module.

| Indicator    |       |   |
|--------------|-------|---|
| Power        | off   | The unit is not powered                                       |
|              | green | Power connected   |
| Video Output | off   | No link - no carrier signal present                           |
|              | red   | Link on – carrier signal present, but no video signal present |
|              | green | Composite video signal present                                |
| Data Link    | off   | No received optical signal present                            |
|              | green | Optical signal received                                       |
| Data Tx1     | off   | No data signal present at the optical transmitter Ch.1 input  |
|              | red   | Data signal is present at the optical transmitter Ch.1 input  |
| Data Rx1     | off   | No data signal present at the optical receiver Ch.1 output    |
|              | green | Data signal is present at the optical receiver Ch.1 output    |
| Data Tx2     | off   | No data signal present at the optical transmitter Ch.2 input  |
|              | red   | Data signal is present to the optical transmitter Ch.2 input  |
| Data Rx2     | off   | No data signal present at the optical receiver Ch.2 output    |
|              | green | Data signal is available at the optical receiver Ch.2 output  |


## Data Connector Pinouts


Data Port - RJ45 Modular Receptacle




RS-422 Data Port Connector

| RS-422        | Tx1 (IN1) | Rx1 (OUT1) | Tx2 (IN2) | Rx2 (OUT2) |
|---------------|-----------|------------|-----------|------------|
| DATA SIGNAL + | 1         | 3          | 5         | 7          |
| DATA SIGNAL - | 2         | 4          | 6         | 8          |


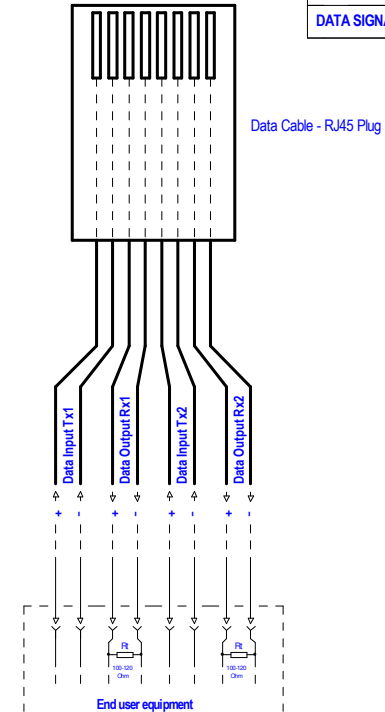


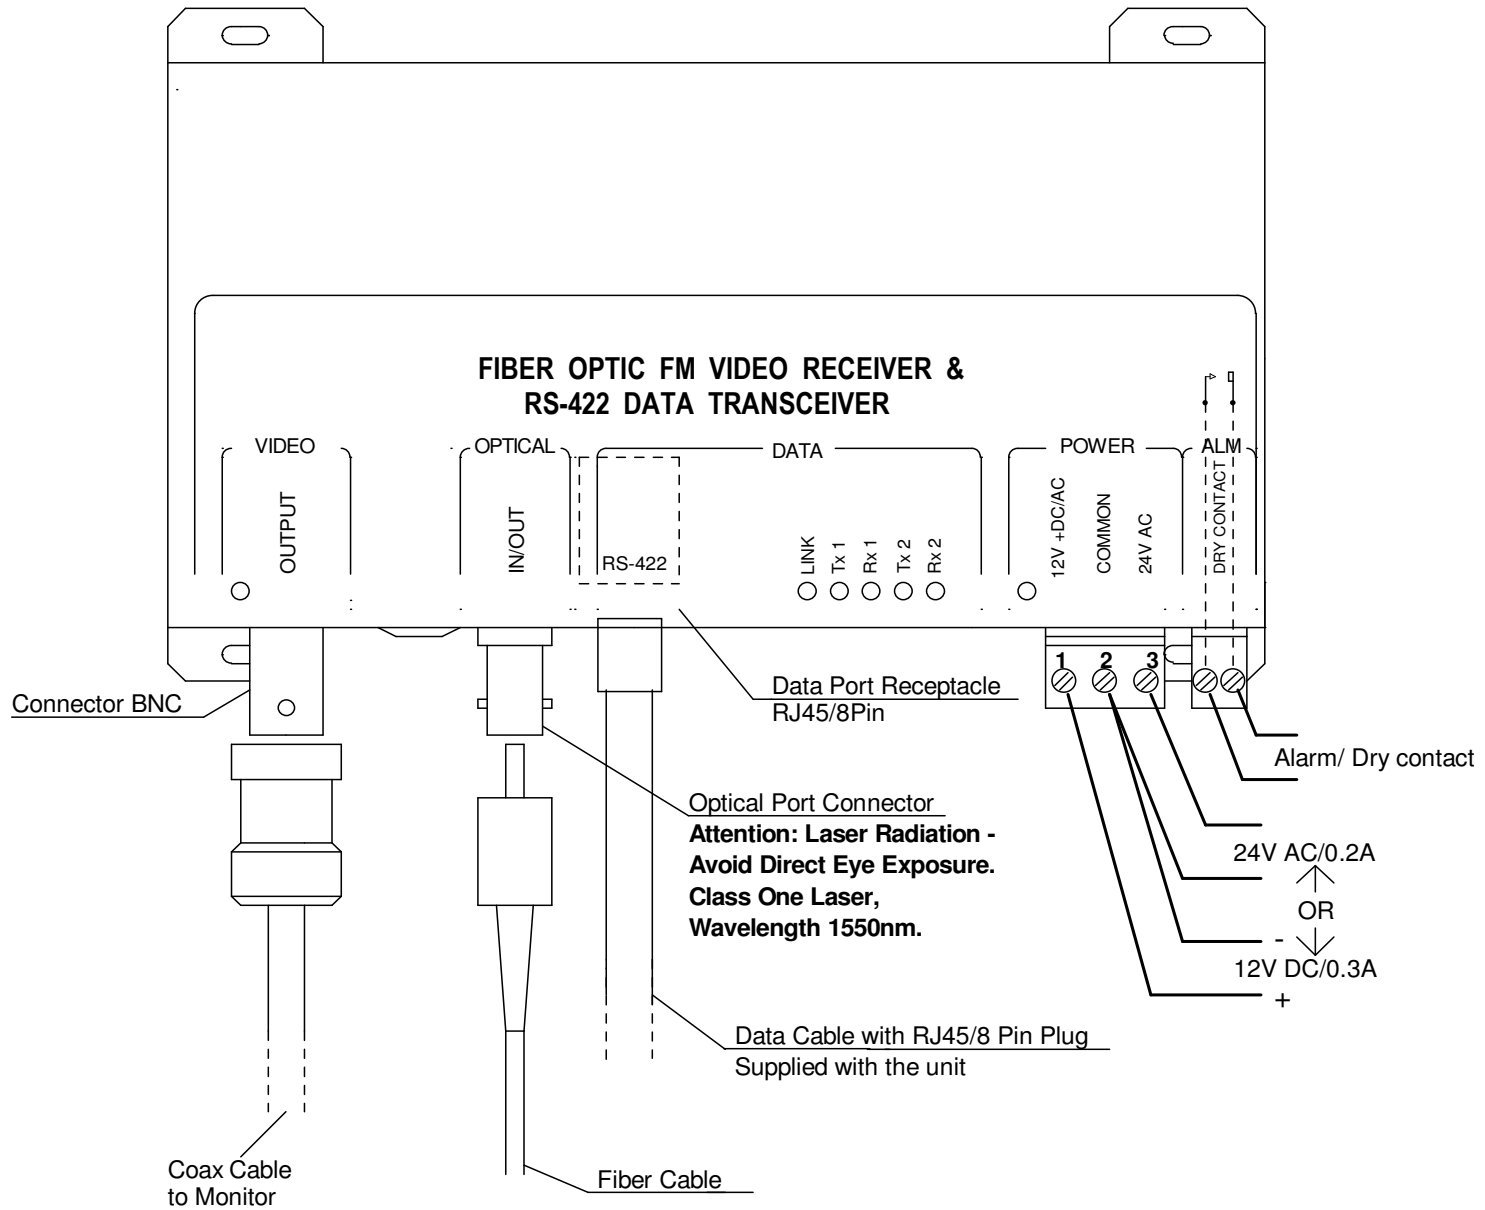


**144S-VR/DX-M1 Video Receiver / Data Transceiver Connections**

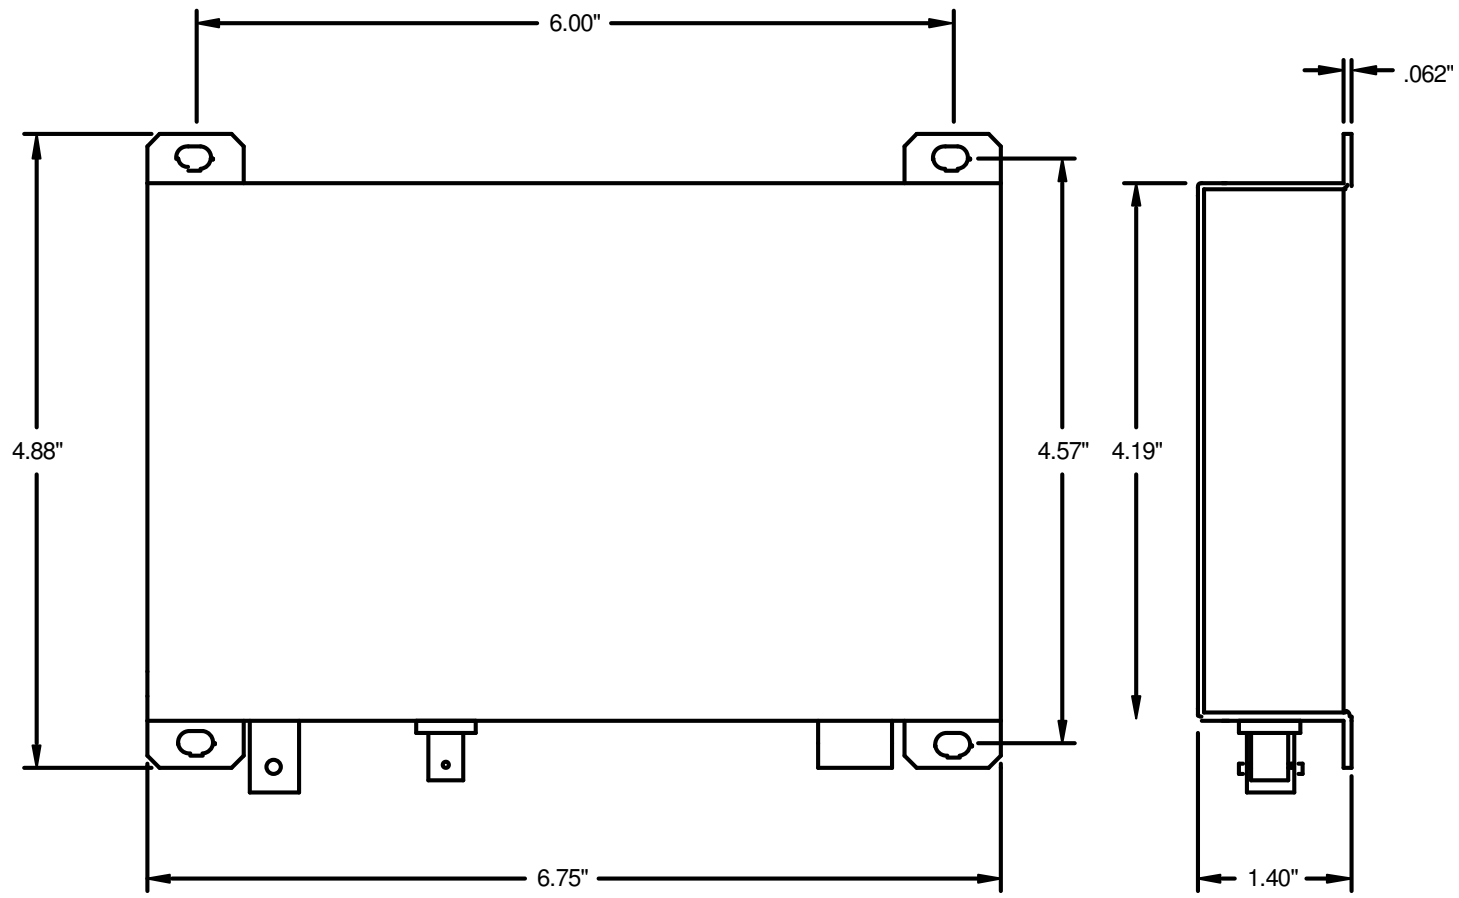


Installation Drawing

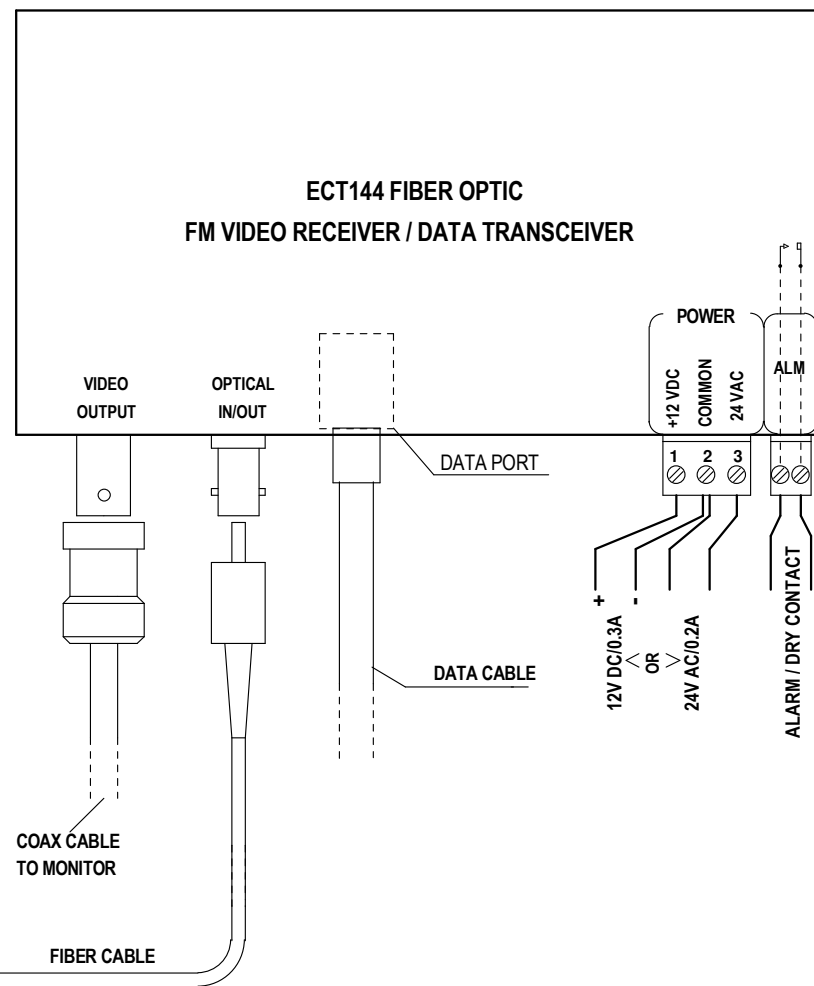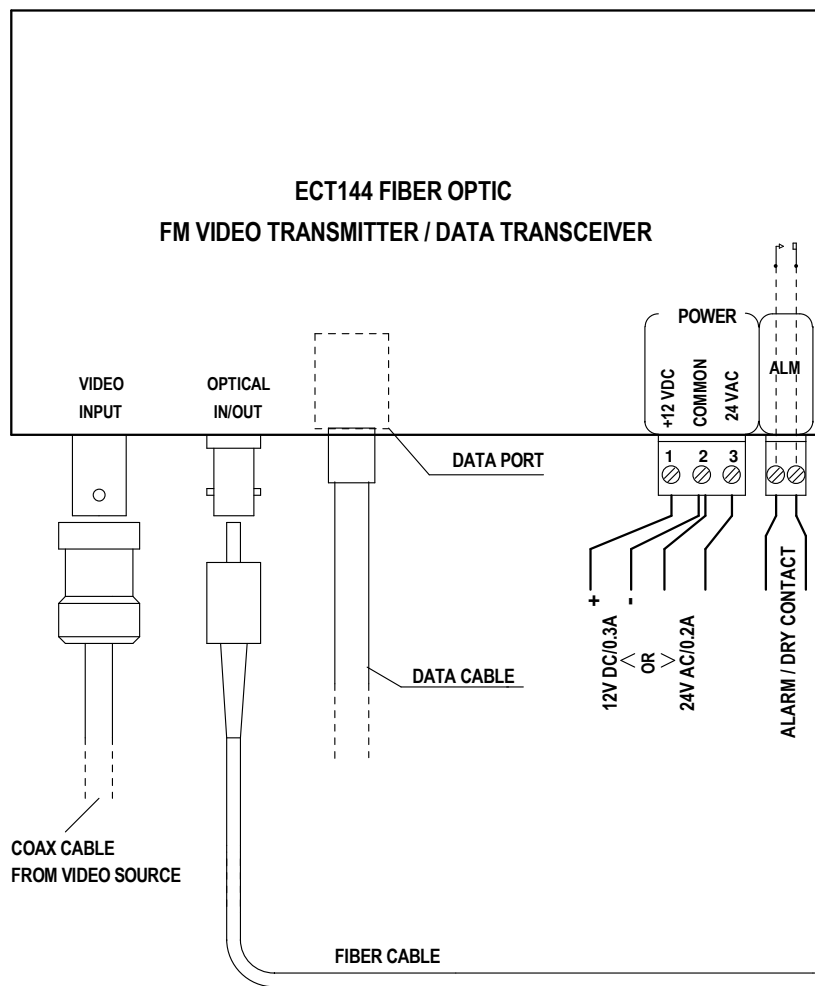

**ECT144 Video & Data Link  
Connection Diagram**

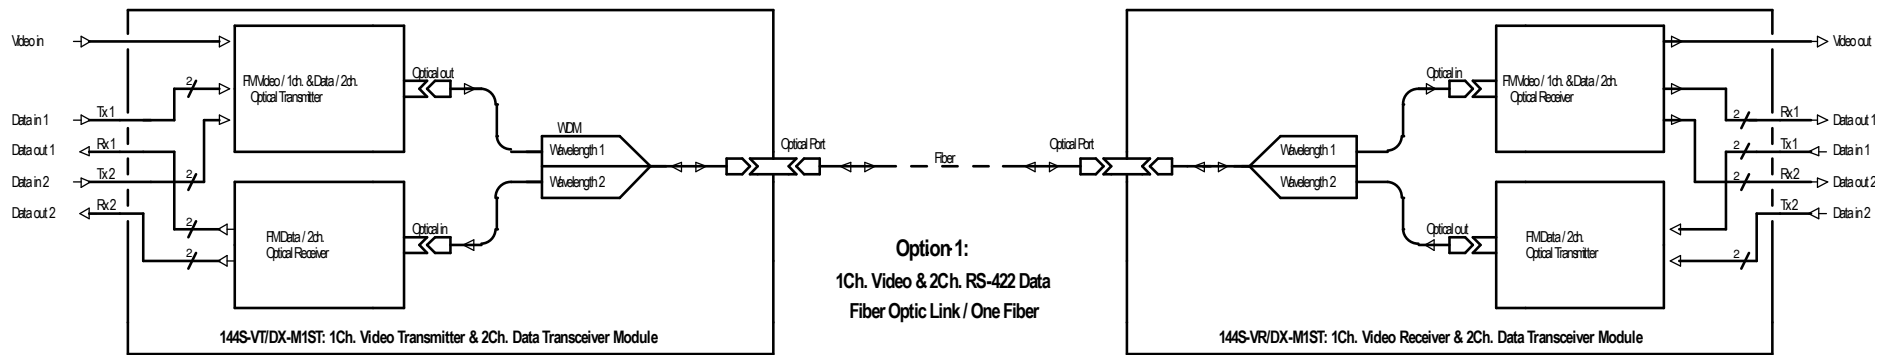

**Video & RS-422 Data Fiber Optic Link Configurations  
Block Diagram**

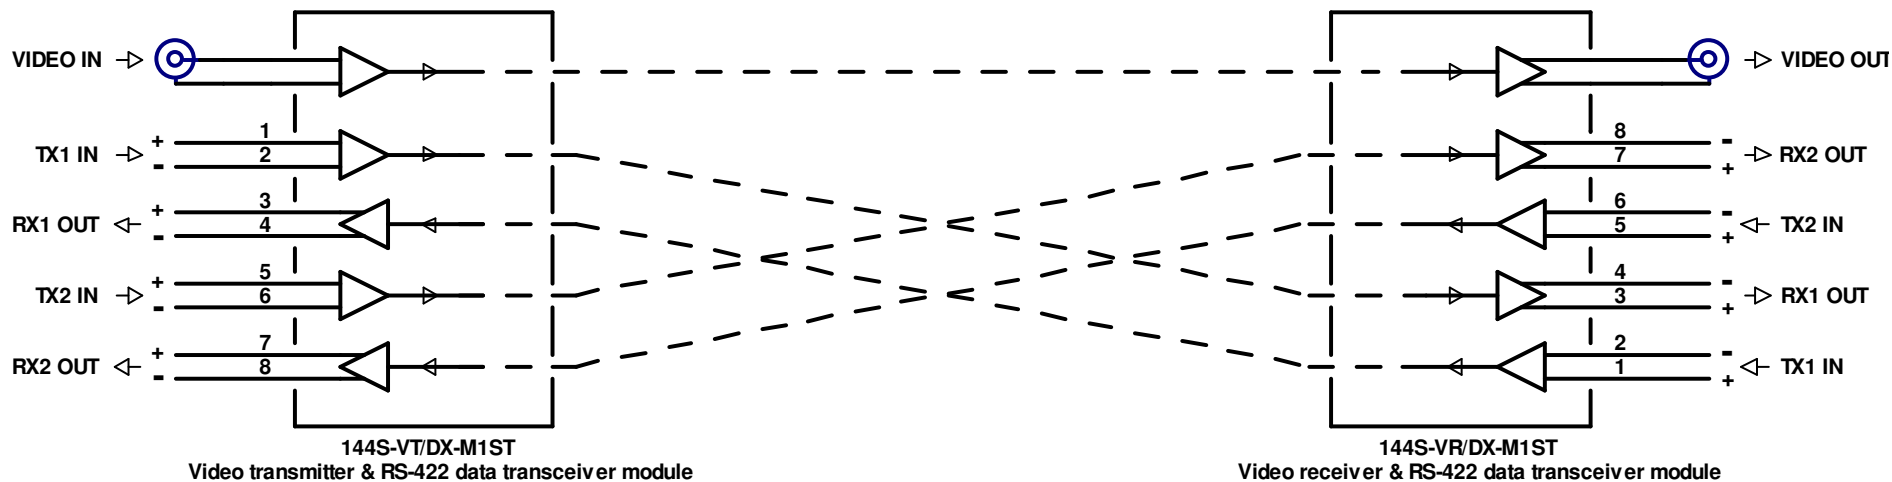

**ECT144 Fiber Optic FM Video & RS-422 Data Optical Link  
Communication Logical Diagram**