



ECT100-AS-MM SINGLE CHANNEL FM UNIVERSAL ANALOG SIGNAL MINI OPTICAL LINK

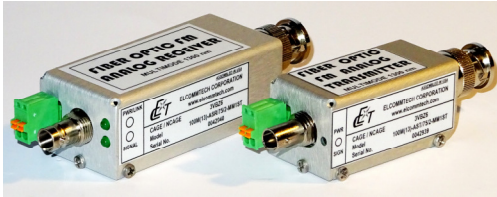

The ECT100-AS-MM FM system provides high performance link for unidirectional transmission of various analog signals over a fiber optic cable.

The ECT100-AS-MM FM transmitter/receiver is fully compatible with ECT200-AS & ECT400-AS type systems allowing for mixed configurations when required.

The ECT100-AS-MM system utilizes linear frequency modulation and very low noise transmission technology to assure high quality and stability.

FEATURES

- FM Transmitting Technology
- Wide Bandwidth Transmission from 10 Hz to 26 MHz
- Supports Transmission of Various Analog Signals such as: Timing, HDTV Tri-Level Sync, T1/E1, RF/IF, Video, Telemetry Signals and more
- Multimode and Single Mode Versions
- High Accuracy In/Out Signal Transmission with No Adjustments
- Power and Signal Status Indicators

Operating Wavelength	850 nm	1300 nm	1310/1550nm
Optical Core Diameter	50μ/62.5μ		8/10μ
Optical Power Source	VCSEL	LED	Laser
Optical Power Output*	-3 dBm**	-14 dBm**	-3 dBm
Receiver Sensitivity	-28 dBm	-32 dBm	-34 dBm
Optical Connectors	ST		FC, ST

* with +/- 1 dBm variation; higher power laser sources are available per special request;

** measured with 62.5μ fiber.

Signal Bandwidth @ 2dB	10 Hz - 26 MHz
Input/Output Impedance	Unbalanced 50, 75, 100 Ohm
Input/Output Signal Level	0 to +/- 2.0 V
Signal Transfer Accuracy	< 5%
Signal-to-Noise Ratio*	64 dB
Input/Output Connector	BNC
Power Requirements:	
Transmitter Module	6 - 7 VDC @ 120mA (regulated)
Receiver Module	6 - 7 VDC @ 240mA (regulated)
Operating Temperature	0°C to +50°C (32°F to +122°F)
Dimensions:	
Transmitter Module	2.73"(69.3mm) x 1.00"(25.4mm) x 0.93"(23.6mm)
Receiver Module	3.40"(86.4mm) x 1.20"(30.5mm) x 0.93"(23.6mm)

*measured with 1km optical cable;



ORDERING INFORMATION

100E-AST/I-MM1Z – transmitter module

100E-ASR/I-MM1Z – receiver module

- E = **M** for multimode 850 nm
- = **M(13)** for multimode 1300 nm
- = **S** for single mode receiver or 1310 nm transmitter
- = **SP** for single mode high power (≥ 0 dBm) 1310 nm transmitter
- = **SPD** for single mode high power (≥ 0 dBm) 1310 nm / DFB transmitter
- = **S(15)** for single mode 1550 nm transmitter
- = **S(15)P** for single mode high power (≥ 0 dBm) 1550 nm transmitter
- = **S(15)D** for single mode 1550 nm / DFB transmitter
- = **S(15)PD** for high power (≥ 0 dBm) 1550 nm / DFB transmitter
- = **S(W)** for single mode CWDM / DFB transmitter
- = **S(W)P** for high power (≥ 0 dBm) CWDM / DFB transmitter

CWDM wavelength (**W**): **14.7**(1470 nm), **14.9**(1490 nm), **15.1**(1510 nm), **15.3**(1530 nm),
15.5(1550 nm), **15.7**(1570nm), **15.9**(1590 nm), **16.1**(1610 nm).

- I = **50, 75, 100** for input/output impedance

- Z = **FC, ST** for optical connectors

Note: The specifications are subject to change without notice.



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235
Tel (718) 743-2869 • Fax (718)648-3642 • E-mail sales@elcommtech.com
<http://www.elcommtech.com>