



ECT100B-MM SINGLE CHANNEL VIDEO FM MINI OPTICAL LINK WITH 26 MHZ CHANNEL BANDWIDTH

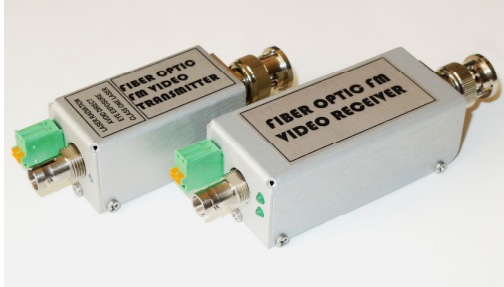

ECT100B-MM system provides high performance link for unidirectional transmission of composite video signal over a fiber optic cable.

The system features CCTV professional video quality and guarantees quality transmission of video signals with maximum bandwidth up to 26 MHz.

The ECT100B-MM FM video mini transmitter/receiver are fully compatible with any ECT100B, ECT200B or ECT400B type receiving/transmitting systems allowing for mixed configurations when required.

The ECT100B-MM FM video mini transmitter/receiver utilizes linear frequency modulation and very low noise transmission technology to assure high quality and stability.

FEATURES

- ❑ CCTV Professional Video Quality
- ❑ Up to 26 MHz Video Bandwidth
- ❑ Compatible with NTSC, PAL and SECAM Transmission
- ❑ Isolates EMI, RFI, Ground Loops
- ❑ Multimode and Singlemode Versions
- ❑ Power/Signal Status Indicator
- ❑ Compatible with 100 - 400 Series
- ❑ Compatible with 6 - 12 VDC Power Sources

Operating Wavelength	850 nm	1300 nm	1310/1550nm
Optical Core Diameter	50μ/62.5μ		8/10μ
Optical Power Source	VCSEL	LED	Laser
Optical Power Output*	-3 dBm	-14 dBm	-3 dBm
Receiver Sensitivity	-30 dBm	-34 dBm	-36 dBm
Optical Connectors	ST		FC, ST

* with +/- 1 dBm variation; higher power laser sources are available per special request.

Video Bandwidth @ 2 dB	10Hz - 26 MHz
Video Input	75Ω unbalanced
Video Input Level	NTSC: 1.0 V p-p, PAL: 1.3 V p-p
Signal-to-Noise Ratio	66 dB*
Differential Gain	< 3 %
Differential Phase	< 3°
Field Tilt	< 1 %
Luminance Non-Linearity	< 3 %
Power Requirements:	
Transmitter	6-12 VDC @ 100mA for SM & MM/850nm 6-12 VDC @ 140mA for MM/1300nm
Receiver	6 - 7 VDC @ 200mA (regulated)
Operating Temperature	-30°C to +70°C (-22°F to +158°F)
Module Dimensions:	
Transmitter**	2.73"(69.4mm) x 1.0"(25.4mm) x 0.92"(23.4mm)
Receiver**	3.42"(86.8mm) x 1.20"(30.7mm) x 0.92"(23.4mm)

*measured as per RS-250C @ 100m for multimode and 1km for single mode optical cable;

**measured without optical & power connectors.



ORDERING INFORMATION

100BE-VT-MM1Z – Video transmitter module

100BE-VR-MM1Z – Video receiver module

- E = M for multimode 850 nm
- = M(13) for multimode 1300 nm
- = S for single mode receiver or 1310 nm transmitter
- = SP for single mode high power (≥ 0 dBm) 1310 nm transmitter
- = SPD for single mode high power (≥ 0 dBm) 1310 nm / DFB transmitter
- = S(15) for single mode 1550 nm transmitter
- = S(15)P for single mode high power (≥ 0 dBm) 1550 nm transmitter
- = S(15)D for single mode 1550 nm / DFB transmitter
- = S(15)PD for high power (≥ 0 dBm) 1550 nm / DFB transmitter
- = S(W) for single mode CWDM / DFB transmitter
- = S(W)P for high power (≥ 0 dBm) CWDM / DFB transmitter

CWDM wavelength (W): 14.7(1470 nm), 14.9(1490 nm), 15.1(1510 nm), 15.3(1530 nm),
15.5(1550 nm), 15.7(1570nm), 15.9(1590 nm), 16.1(1610 nm).

Z = FC, ST for optical connectors

Note: The specifications are subject to change without notice.



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235
Tel (718) 743-2869 • Fax (718)648-3642 • E-mail sales@elcommtech.com
<http://www.elcommtech.com>