

ECT120D FM VIDEO, AUDIO AND DATA OPTICAL LINK



FEATURES


- * CCTV Professional Video & Audio Quality
- * NTSC, PAL, SECAM Compatible
- * Balanced Video Input
- * BNC I/O Video Connector
- * Screw Terminal Block (3 pos. Plug) Audio & Data Connectors
- * ST, FC, SC Optical Connector
- * No User Adjustments
- * Status Monitor LEDs



APPLICATIONS

- * Security and Surveillance
- * Video Teleconferencing
- * Campus Media Retrieval/Distance Learning
- * Telemedicine

LAYOUT DIAGRAM

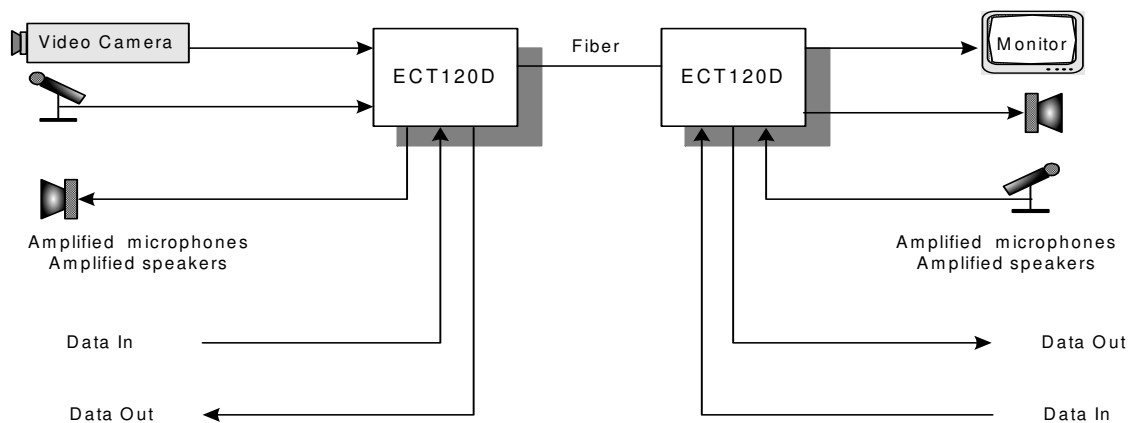

SPECIFICATIONS

Video Performance

Video In/Output Impedance	75 Ohm, balanced
Video In/Output Voltage	1.0V p-p typ, 1.5V max
Video Bandwidth @ 1dB	10Hz to 6.5MHz
Differential Gain (10-90% APL)	< 4%
Differential Phase (10-90% APL)	< 4°
Signal to Noise Ratio	62dB (weighted)**

Audio Performance

Audio Input Impedance	600 Ohm or 10K, balanced or unbalanced
Audio Input Level	up to +8 dBm* or up to +18 dBm
Audio Output Level	up to +8 dBm @ 600 Ohm or 10K balanced or unbalanced up to +18dBm @ 10K, balanced
Frequency Response @ 3dB	20Hz to 20kHz
Distortions	< 1.5%*
Signal to Noise Ratio	> 62dB (weighted)**

* with normal level 0 dBm;

** measured with 1km/8-10μ SM cable and 100m/62.5μ MM cable

Data Performance

Data rate range	DC – 50 kb/sec
Contact Closure Out	Dry contact @ load 30 VDC or 24 VAC / 1A max
Contact Bounce Time	< 5 msec

General Parameters

Operating Temperature	- 30°C to +70°C
Storage Temperature	- 40°C to +85°C
Operating Humidity	0 to 95% non-condensing
Weight (module)	400g (14oz)
Weight (1 slot card)	370g (13oz)
Dimensions (module)	156mm (6.15") L, 84mm (3.3") W, 62mm (2.42") H
Power (optional)	
option 1	6 - 7 VDC, 0.25 – 0.5 A
option 2	10 -15 VDC, 0.15 - 0.3 A
Mean Time Between Failures (MTBF)	>100,000Hrs.

Optical Performance

Operating Wavelength	850nm	1300nm		1310 and/or 1550nm
Transmitter Optical Source	Laser	LED		Laser
Fiber Type	50/125μ or 62.5/125μ	50/125μ	62.5/125μ	Singlemode
Transmitter Output Power (with +/- 1dBm variation)	-7 dBm	-17 dBm	-14 dBm	-7 dBm
Receiver Sensitivity (2 fiber)	-29 dBm	-32 dBm		-33 dBm
Optical Loss Budget (2 fiber)	22 dB	15 dB	18 dB	26 dB
Receiver Sensitivity (1 fiber)	-29 dBm @ 850nm			-32 dBm
Optical Loss Budget (1 fiber)	22 dB @ 850nm			25 dB



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235
 Tel (718) 743-2869 • Fax (718)648-3642 • E-mail sales@elcommtech.com
<http://www.elcommtech.com>

ORDERING INFORMATION

120DE-VADT-M(P)1Z – Video, audio & data transmitter module

120DE-VADR-M(P)1Z – Video, audio & data receiver module

120DE-VADT2-M(P)YZ – Dual video, audio & data transmitter module

120DE-VADR2-M(P)YZ – Dual video, audio & data receiver module

120DE-VT/ADR-M(P)YZ – Video transmitter & audio, data receiver module

120DE-VR/ADT-M(P)YZ – Video receiver & audio, data transmitter module

120DE-VT/ADX-M(P)YZ – Video transmitter & audio, data transceiver module

120DE-VR/ADX-M(P)YZ – Video receiver & audio, data transceiver module

120DE-VADX-M(P)YZ – Video, audio & data transceiver module

120DE-VADT2-CYZ – Dual video, audio & data transmitter rack card*

120DE-VADR2-CYZ – Dual video, audio & data receiver rack card*

120DE-VT/ADR-CYZ – Video transmitter & audio, data receiver rack card*

120DE-VR/ADT-CYZ – Video receiver & audio, data transmitter rack card*

120DE-VT/ADX-CYZ – Video transmitter & audio, data transceiver rack card*

120DE-VR/ADX-CYZ – Video receiver & audio, data transceiver rack card*

120DE-VADX-CYZ – Video, audio & data transceiver rack card*

D = **1** for TTL/CMOS, **3** for RS-232, **4** for RS-422, **9** for Contact Closure

E = **M** for multimode

= **M(13)** for multimode 1300nm only

= **S, SP**** for single mode 1310nm

= **S(15), S(15)P**** for single mode 1550nm

P = **12** for 10-15VDC power option (for module only)

Y = **1, 2** for number of fibers

Z = **FC** connector

= **ST** connector

= **SC** connector (for module only)

**Compatible with USR series chassis;*

***For high power (0 dBm) laser source options.*

Note: The specifications are subject to change without notice.



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235
Tel (718) 743-2869 • Fax (718)648-3642 • E-mail sales@elcommtech.com
<http://www.elcommtech.com>

© 2018 Elcommtech Corp. All rights reserved



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235
Tel (718) 743-2869 • Fax (718)648-3642 • E-mail sales@elcommtech.com
<http://www.elcommtech.com>

© 2018 Elcommtech Corp. All rights reserved