



## ECT400B-R-L FOUR CHANNEL VIDEO WITH 30 MHZ BANDWIDTH, 0 – 5 V SIGNAL AND UP TO 136 km/85 mi RANGE FM OPTICAL LINK

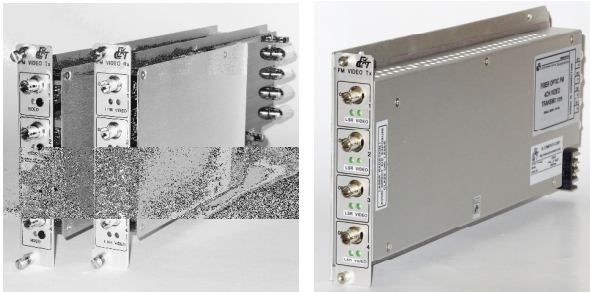

### FEATURES

- ❑ Remote Transmission Solution for Radar Display Applications
- ❑ Composite and Component Video Transmission
- ❑ Up to 30 MHz Video Bandwidth
- ❑ Operating Range Up to 136 km / 85 miles
- ❑ Video Gen-Lock and Sync Transmission
- ❑ Balanced Video Inputs
- ❑ 4 Channels per Single Card
- ❑ Four, Two or One Fiber Configurations
- ❑ Power and Signal Status Indicators

Configuration	4 Fiber	2 Fiber	1 Fiber
Operating Wavelength	1550 nm	1530/1570 nm	1490, 1530, 1570, 1610 nm
Optical Core Diameter	8/10µ		
Optical Power Source	DFB Laser		
Optical Power Output	0 (+/- 0.5) dBm		
Receiver Sensitivity:	-44 dBm	-43 dBm	
Optical Connectors	FC, SC, ST		

The ECT400B-R-L system provides high performance link for transmitting up to four unidirectional video signals 0 - 5 Vp-p over four or two fiber optic cables. The ECT400B-R-L system is designed to be used a remote transmission solution for radar and special purpose display applications. The link can be also used to transmit video gen-lock, sync, and component video signals over fiber optic cable. All ECT400B-R-L transmitter/receiver cards are fully compatible with any ECT100B-R-L and ECT200B-R-L type system allowing for mixed configurations when required. The ECT400B-R-L utilizes linear frequency modulation and very low noise transmission technology to assure high quality and stability.

System Bandwidth @ 2 dB	30 MHz
Signal Input Impedance (transmitter)	75 Ohm balanced
Input/Output Signal Level	0 - 5 Vp-p @ 75 Ohm
Signal-to-Noise Ratio*	64 dB
Differential Gain	< 3 %
Differential Phase	< 3°
Sync Tilt	< 1.0 %
Power Requirements (transmitter)	11 – 15 VDC/0.3A
Power Requirements (receiver)	11 – 15 VDC/0.5A
Operating Temperature	-30°C to +70°C (-22°F to +158°F)
Dimensions	11.6" (295 mm) x 5.2" (132 mm) x 1.05" (27 mm)
Mean Time Between Failures (MTBF):	>100,000 Hrs.

\*measured with 10 dBm optical attenuation.



## ORDERING INFORMATION

400BS-VT-M4Z-R-L – transmitter module 1550 nm / 4 fiber  
400BS-VT-M2Z-R-L – transmitter module 1530 & 1570 nm / 2 fiber  
400BS-VT-M1Z-R-L – transmitter module 1490, 1530, 1570 & 1610 nm / 1 fiber

400BS-VT-C4Z-R-L – transmitter card\* 1550 nm / 4 fiber  
400BS-VT-C2Z-R-L – transmitter card\* 1530 & 1570 nm / 2 fiber  
400BS-VT-C1Z-R-L – transmitter card\* 1490, 1530, 1570 & 1610 nm / 1 fiber

400BS-VR-M4Z-R-L – receiver module 1260 - 1620 nm / 4 fiber  
400BS-VR-M2Z-R-L – receiver module 1530 & 1570 nm / 2 fiber  
400BS-VR-M1Z-R-L – receiver module 1490, 1530, 1570 & 1610 nm / 1 fiber

400BS-VR-C4Z-R-L – receiver card\* 1260 - 1620 nm / 4 fiber  
400BS-VR-C2Z-R-L – receiver card\* 1530 & 1570 nm / 2 fiber  
400BS-VR-C1Z-R-L – receiver card\* 1490, 1530, 1570 & 1610 nm / 1 fiber

**Z** = **FC, SC, ST** for optical connectors

*\*compatible with USR type chassis;*

**Note:** The specifications are subject to change without notice.



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235  
Tel (718) 743-2869 • Fax (718)648-3642 • E-mail [sales@elcommtech.com](mailto:sales@elcommtech.com)  
<http://www.elcommtech.com>