

ECT020

DUAL CHANNEL FM AUDIO OPTICAL LINK




FEATURES

- * Frequency Modulation (FM) Quality
- * Surface Mount Technology
- * Screw Terminal Block (3 pos. Plug) Audio Connectors
- * ST, FC, SC Optical Connector
- * 2 Channels Audio
- * Up to 5 km/3mi on 850nm multimode;
- * Up to 16 km/10mi on 1300nm multimode;
- * Up to 50km/30mi on 1310nm singlemode;
- * Up to 80km/50mi on 1550nm singlemode;
- * No User Adjustments
- * Status Monitor LEDs

APPLICATIONS

- * Intercom and Audio Broadcasting
- * Security and Surveillance
- * Campus Media Retrieval/Distance Learning
- * Studio Applications

LAYOUT DIAGRAM

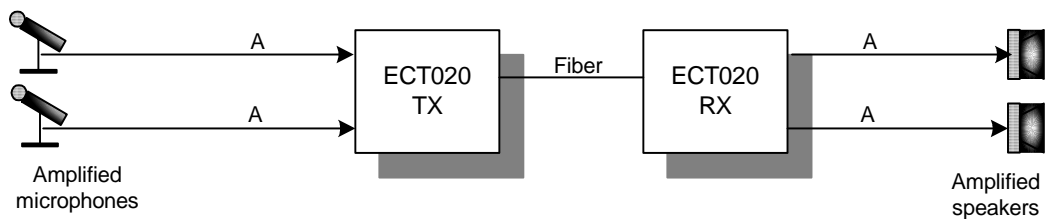

ECT100 SERIES

SPECIFICATIONS

Audio Performance

Audio Input Impedance	600 Ohm or 10K, balanced
Audio In/Out Level	0dBm @ 600 Ohm or 10K +18dBm @ 10K
Frequency Response @ 3dB	20Hz to 20kHz
Distortions	< 1.5%
Signal to Noise Ratio	> 68dB (weighted)*

* measured with 1km, 62.5 μ cable

General Parameters

Operating Temperature	- 30°C to +70°C
Storage Temperature	- 40°C to +85°C
Operating Humidity	0 to 95% non-condensing
Weight	340g (12oz)
Dimensions	156mm (6.15") L, 84mm (3.3") W, 62mm (2.42") H
Power (optional)	
option 1	6 - 7 VDC, 0.2A max
option 2	10 - 15 VDC, 0.15A max
Mean Time Between Failures (MTBF)	>100,000Hrs.

Optical Performance

Operating Wavelength	850nm	1300nm		1310 or 1550nm
Transmitter Optical Source	Laser	LED		Laser
Fiber Type	50/125 μ or 62.5/125 μ	50/125 μ	62.5/125 μ	Singlemode
Transmitter Output Power	-5 dBm	-17 dBm	-14 dBm	-6 dBm
Receiver Sensitivity	-33 dBm	-36 dBm		-36 dBm
Optical Loss Budget	28 dB	19 dB	22 dB	30 dB

ORDERING INFORMATION

020E-AU-M(P)1Z

- E** = **M** for multimode
= **M(13)** for multimode 1300nm only
= **S** for single mode
= **S(15)** for single mode 1550nm only
P = **12** for 10-15VDC power option (for module only)
U = **T** for transmitter, **R** for receiver
Z = **FC** connector
= **ST** connector
= **SC** connector



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235
Tel (718) 743-2869 • Fax (718)648-3642 • E-mail sales@elcommtech.com
<http://www.elcommtech.com>