



## ECT100B-MM SINGLE CHANNEL VIDEO FM MINI OPTICAL LINK WITH 30 MHZ CHANNEL BANDWIDTH

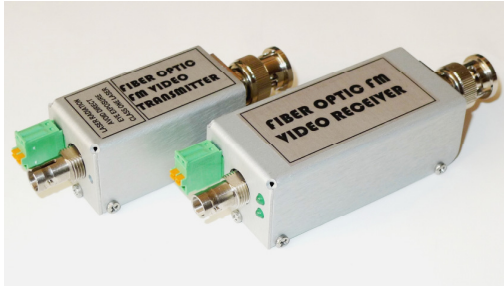

ECT100B-MM system provides high performance link for unidirectional transmission of composite video signal over a fiber optic cable.

The system features CCTV professional video quality and guarantees quality transmission of video signals with maximum bandwidth up to 30 MHz.

The ECT100B-MM FM video mini transmitter/receiver are fully compatible with any ECT100B, ECT200B or ECT400B type receiving/transmitting systems allowing for mixed configurations when required.

The ECT100B-MM FM video mini transmitter/receiver utilizes linear frequency modulation and very low noise transmission technology to assure high quality and stability.

### FEATURES

- ❑ CCTV Professional Video Quality
- ❑ Up to 30 MHz Video Bandwidth
- ❑ Compatible with NTSC, PAL and SECAM Transmission
- ❑ Isolates EMI, RFI, Ground Loops
- ❑ Multimode and Singlemode Versions
- ❑ Power/Signal Status Indicator
- ❑ Compatible with 100 - 400 Series
- ❑ Compatible with 6 - 12 VDC Power Sources

Operating Wavelength	850 nm	1300 nm	1310/1550nm
Optical Core Diameter	50μ/62.5μ		8/10μ
Optical Power Source	VCSEL	LED	Laser
Optical Power Output*	-3 dBm	-14 dBm	-4 dBm
Receiver Sensitivity	-31 dBm	-33 dBm	-35 dBm
Optical Connectors	ST		FC, ST

\* with +/- 1 dBm variation; higher power laser sources are available per special request.

<b>Video Bandwidth @ 2 dB</b>	10Hz - 30 MHz
<b>Video Input</b>	75Ω unbalanced
<b>Video Input Level</b>	NTSC: 1.0 V p-p, PAL: 1.3 V p-p
<b>Signal-to-Noise Ratio</b>	66 dB*
<b>Differential Gain</b>	< 3 %
<b>Differential Phase</b>	< 3°
<b>Field Tilt</b>	< 1 %
<b>Luminance Non-Linearity</b>	< 3 %
<b>Power Requirements:</b>	
<b>Transmitter</b>	6-12 VDC @ 100mA for SM & MM/850nm 6-12 VDC @ 140mA for MM/1300nm
<b>Receiver</b>	6 - 7 VDC @ 200mA (regulated)
<b>Operating Temperature</b>	-30°C to +70°C (-22°F to +158°F)
<b>Module Dimensions:</b>	
<b>Transmitter**</b>	2.73"(69.4mm) x 1.0"(25.4mm) x 0.92"(23.4mm)
<b>Receiver**</b>	3.42"(86.8mm) x 1.20"(30.7mm) x 0.92"(23.4mm)

\*measured as per RS-250C @ 100m for multimode and 1km for single mode optical cable;

\*\*measured without optical & power connectors.



## ORDERING INFORMATION

100BE-VT-MM1Z – Video transmitter module

100BE-VR-MM1Z – Video receiver module

- E = M for multimode 850 nm
- = M(13) for multimode 1300 nm
- = S for single mode receiver or 1310 nm transmitter
- = SP for single mode high power ( $\geq 0$  dBm) 1310 nm transmitter
- = SPD for single mode high power ( $\geq 0$  dBm) 1310 nm / DFB transmitter
- = S(15) for single mode 1550 nm transmitter
- = S(15)P for single mode high power ( $\geq 0$  dBm) 1550 nm transmitter
- = S(15)D for single mode 1550 nm / DFB transmitter
- = S(15)PD for high power ( $\geq 0$  dBm) 1550 nm / DFB transmitter
- = S(W) for single mode CWDM / DFB transmitter
- = S(W)P for high power ( $\geq 0$  dBm) CWDM / DFB transmitter

CWDM wavelength (W): 14.7(1470 nm), 14.9(1490 nm), 15.1(1510 nm), 15.3(1530 nm),  
15.5(1550 nm), 15.7(1570nm), 15.9(1590 nm), 16.1(1610 nm).

Z = FC, ST for optical connectors

**Note:** The specifications are subject to change without notice.



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235  
Tel (718) 743-2869 • Fax (718)648-3642 • E-mail [sales@elcommtech.com](mailto:sales@elcommtech.com)  
<http://www.elcommtech.com>