


## ECT211H DUAL VIDEO WITH FOUR DUPLEX TTL/CMOS DATA CHANNELS DIGITAL OPTICAL RECEIVER

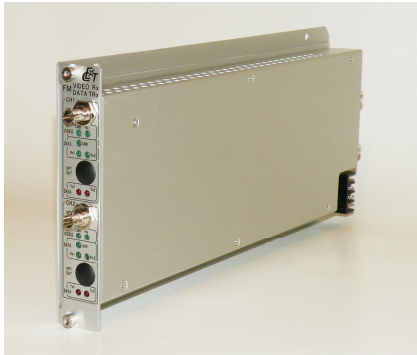

Video	Data
2	4
→	↔

ECT211H system provides high performance link for receiving dual unidirectional composite video channel along with four bi-directional TTL/CMOS data channels over two or four fibers. The system features broadcast video quality providing 10-bit video processing with uncompressed digital transmission. ECT211H utilizes high speed analog-to-digital and digital-to-analog conversion with 10-bit resolution, digital signal processing, time division multiplexing, fibre optic transmission at a data rate of up to 1400 Mbit/sec and high speed TTL/CMOS data transfer capability.

### ORDERING INFORMATION

211HE-VR/DXN-CYZ – 2 x Video RX/data TRX card  
 211HE-VR/DXN-MYZ – 2 x Video RX/data TRX module  
 RX – receiver, TRX – transceiver

**E** = **M** for multimode 850 nm/TX  
 = **S** for single mode 1310 nm/TX  
 = **S(15)** for single mode 1550 nm/TX

**N** = **5, 10\*** for data rate maximum in Mb/sec\*\*  
**Y** = **2** for one fiber system (1 fiber per channel)  
 = **4** for dual fiber system (2 fiber per channel)

**Z** = **ST, SC, FC** for optical connectors

\*for one data channel only;

\*\*specified by customer.

### FEATURES

- Broadcast Video Quality
- Compatible with NTSC, PAL and SECAM Transmission
- High Speed Duplex TTL/CMOS Data Ports
- Multimode and Singlemode Versions
- Power and Signal Status Indicators

Operating Wavelength	850 nm	850/1300 nm	1310/1550nm
Optical Core Diameter	50μ/62.5μ		8/10μ
Optical Power Source	VCSEL	LED	Laser
Optical Power Output*	-3 dBm	-14 dBm	-3 dBm
Receiver Sensitivity	-30 dBm		-33 dBm
Receiver Sensitivity**	-28 dBm		-31 dBm
Optical Connectors	ST, SC		ST, SC, FC

\* with +/- 1 dBm variation; higher power laser sources are available per special request;

\*\* for one-fiber configuration with internal WDM.

Video Bandwidth @ 2 dB*	10 MHz
Video Conversion Resolution	10 bit
Video Output	75 Ohm unbalanced
Video Output Level	NTSC: 1.0 V p-p, PAL: 1.3 V p-p
Signal-to-Noise Ratio**	64 dB
Differential Gain	< 0.5 %
Differential Phase	< 0.5 °
Field Tilt	< 0.5 %
Luminance Non-Linearity	< 0.5 %
Data Interface	TTL/CMOS
Data Rate	DC – 2.5 Mb/sec DC - 5 Mb/sec, 10 Mb/sec***
Bit Error Rate	10 <sup>-9</sup>
Power Requirements	11 - 15 VDC @ 600 mA
Operating Temperature	-20°C to +60°C (-4°F to +140°F)
Dimensions	11.6"(295 mm) x 5.2"(132 mm) x
(w/o connectors)	1.05"(27 mm)

\* higher video bandwidth (up to 30 MHz) is available per special request;

\*\* measured as per RS-250C @ 4km, 8-9μ cable;

\*\*\* available per special request; 10 Mb/sec - for one data channel only.

