

ECT220(4)

DUAL CHANNEL FM VIDEO AND 4-CHANNEL FM AUDIO OPTICAL LINK




FEATURES

- * CCTV Professional Video & Audio Quality
- * NTSC, PAL, SECAM Compatible
- * Screw Terminal Block (3 pos. Plug) Audio Connectors
- * ST, FC, SC Optical Connector
- * 2 Channels Video
- * 4 Channels Audio
- * Balanced Video Input
- * Up to 4 km/2.5mi on 850nm multimode;
- * Up to 12 km/7.5mi on 1300nm multimode;
- * Up to 40km/25mi on 1310nm single mode;
- * Up to 65km/40mi on 1550nm single mode;
- * No User Adjustments
- * Status Monitor LEDs

APPLICATIONS

- * Videoconferencing and Media Broadcasting
- * Security and Surveillance
- * Campus Media Retrieval/Distance Learning
- * Studio Applications

LAYOUT DIAGRAM

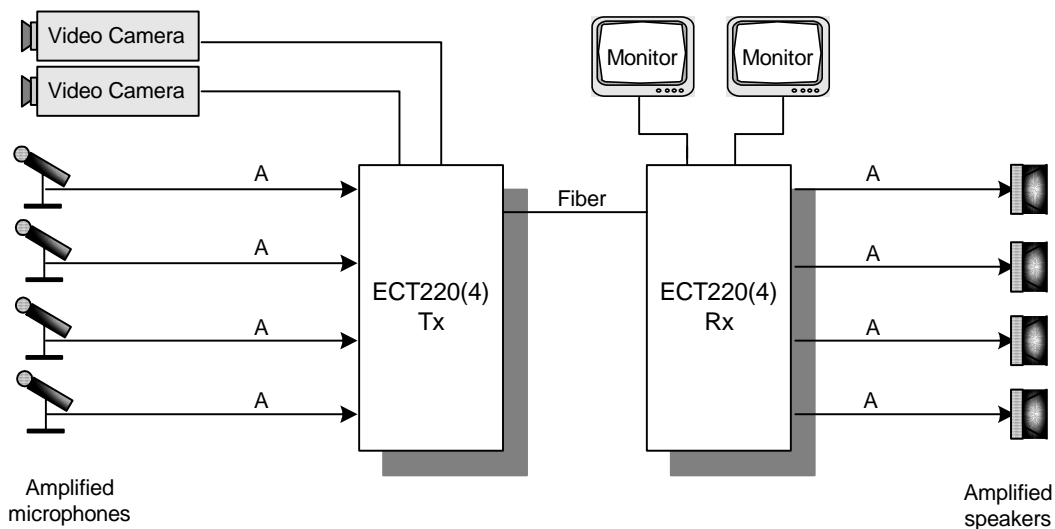

SPECIFICATIONS

Video Performance

Video Input Impedance	75 Ohm, balanced
Video In/Output Voltage	1.0V p-p typ, 1.5V max
Frequency Response @ 1dB	10Hz to 6.5MHz
Differential Gain (10-90% APL)	< 2% typ
Differential Phase (10-90% APL)	< 2° typ
Signal to Noise Ratio	67dB (weighted)

Audio Performance

Audio Input Impedance	600 Ohm or 10K, balanced
Audio In/Output Level	0dBm @ 600 Ohm or 10K +18dBm @ 10K
Frequency Response @ 3dB	20Hz to 20kHz
Distortions	< 1.5%
Signal to Noise Ratio	> 65dB (weighted)

General Parameters

Operating Temperature	- 30°C to +70°C
Storage Temperature	- 40°C to +85°C
Operating Humidity	0 to 95% non-condensing
Weight (module)	400g (14oz)
Weight (1 slot card)	370g (13oz)
Dimensions (module)	156mm (6.15") L, 84mm (3.3") W, 62mm (2.42") H
Power (optional)	
option 1	6 - 7 VDC, 0.45A
option 2	10 - 15 VDC, 0.38A
Mean Time Between Failures (MTBF)	>100,000Hrs.

Optical Performance

Operating Wavelength	850nm	1300nm		1310 and/or 1550nm
Transmitter Optical Source	Laser	LED		Laser
Fiber Type	50/125μ or 62.5/125μ	50/125μ	62.5/125μ	Singlemode
Transmitter Output Power (with +/- 1 dBm variation)	-8 dBm	-17 dBm	-14 dBm	-8 dBm
Receiver Sensitivity (2 fiber)	-30 dBm	-32 dBm		-32 dBm
Optical Loss Budget (2 fiber)	20 dB	15 dB	18 dB	24 dB
Receiver Sensitivity (1 fiber)	-28 dBm @ 850nm			-30 dBm
Optical Loss Budget (1 fiber)	20 dB @ 850nm			22 dB

ORDERING INFORMATION

220E-VAU4-M(P)YZ – standalone module

220E-VAU4-CYZ – rack card*

- E = M for multimode
- = M(13) for multimode 1300nm only
- = S for single mode
- = S(15) for single mode 1550nm only
- U = T for transmitter, R for receiver
- P = 12 for 10-15VDC power option
- Y = 1 for single fiber, 2 for dual fiber
- Z = FC connector
- = ST connector
- = SC connector

*Compatible with USR series chassis



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235
 Tel (718) 743-2869 • Fax (718)648-3642 • E-mail sales@elcommtech.com
<http://www.elcommtech.com>