



## ECT400-R

## FOUR CHANNEL FM VIDEO OPTICAL LINK WITH 0 - 5V SIGNAL RANGE

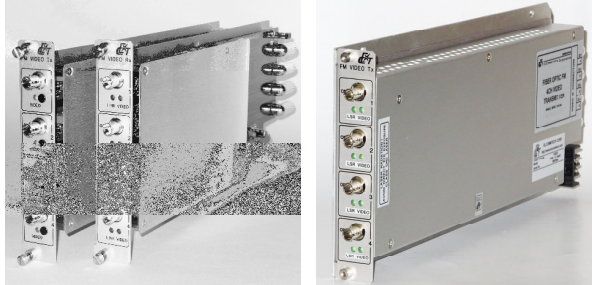

The ECT400-R system provides high performance link for transmitting up to four unidirectional video signals 0 - 5 Vp-p over four or two fiber optic cables. The ECT400-R system is designed to be used a remote transmission solution for radar and special purpose display applications. The link can be also used to transmit video gen-lock, sync, and component video signals over fiber optic cable.

All ECT400-R transmitter/receiver cards are fully compatible with any ECT100-R and ECT100-MM-R type system allowing for mixed configurations when required. The ECT400-R utilizes linear frequency modulation and very low noise transmission technology to assure high quality and stability.

### FEATURES

- ❑ Remote Transmission Solution for Radar Display Applications
- ❑ Composite and Component Video Transmission
- ❑ Up to 18 MHz Video Bandwidth
- ❑ Video Gen-Lock and Sync Transmission
- ❑ Balanced Video Inputs
- ❑ 4 Channels per Single Card
- ❑ Multimode and Singlemode Versions
- ❑ Four, Two or One Fiber Configurations
- ❑ Power and Signal Status Indicators

Operating Wavelength	850 nm	1300 nm	1310/1550 nm
Optical Core Diameter	50μ/62.5μ		8/10μ
Optical Power Source	VCSEL	LED	Laser
Optical Power Output*	-7 dBm	-14 dBm	-8 dBm
Receiver Sensitivity:			
Standard Version	-29 dBm	-33 dBm	-35 dBm
Standard Version**	-28 dBm	-32 dBm	-34 dBm
Optical Connectors	ST, SC		FC, SC, SC

\* with +/- 1 dBm variation; higher power laser sources are available per special request;

\*\* for two or one fiber configuration.

System Bandwidth @ 2 dB	10 Hz - 18 MHz
Signal Input Impedance (transmitter)	75 Ohm balanced
Input/Output Signal Level	0 - 5 Vp-p @ 75 Ohm
Signal-to-Noise Ratio*	64 dB
Differential Gain	< 3 %
Differential Phase	< 3°
Sync Tilt	< 1.0 %
Power Requirements (transmitter)	11 - 15 VDC/0.3A
Power Requirements (receiver)	11 - 15 VDC/0.5A
Operating Temperature	-30°C to +70°C (-22°F to +158°F)
Dimensions	11.6" (295 mm) x 5.2" (132 mm) x 1.05" (27 mm)
Mean Time Between Failures (MTBF):	>100,000 Hrs.

\* measured as per RS-250C @ 1km, 62.5μ cable



## ORDERING INFORMATION

400E-VT-MYZ-R – transmitter module  
400E-VR-MYZ-R – receiver module  
400E-VT-CYZ-R – transmitter card\*  
400E-VR-CYZ-R – receiver card\*

**E** = **M** for multimode 850 nm  
= **M(13)** for multimode 1300 nm  
= **S** for single mode receiver or 1310 nm transmitter  
= **SP** for single mode high power ( $\geq 0$  dBm) 1310 nm transmitter  
= **SPD** for single mode high power ( $\geq 0$  dBm) 1310 nm / DFB transmitter  
= **S(15)** for single mode 1550 nm transmitter  
= **S(15)P** for single mode high power ( $\geq 0$  dBm) 1550 nm transmitter  
= **S(15)D** for single mode 1550 nm / DFB transmitter  
= **S(15)PD** for high power ( $\geq 0$  dBm) 1550 nm / DFB transmitter  
= **S(W)** for single mode CWDM / DFB transmitter  
= **S(W)P** for high power ( $\geq 0$  dBm) CWDM / DFB transmitter

CWDM wavelength (**W**): **14.7**(1470 nm), **14.9**(1490 nm), **15.1**(1510 nm), **15.3**(1530 nm),  
**15.5**(1550 nm), **15.7**(1570nm), **15.9**(1590 nm), **16.1**(1610 nm).

**Y** = **2, 4** for number of fiber

**Z** = **FC, ST, SC** for optical connectors

*\*compatible with USR type chassis;*

**Note:** The specifications are subject to change without notice.



Elcommtech Corp. 2620 Ocean Parkway, Suite 4H, Brooklyn, NY 11235  
Tel (718) 743-2869 • Fax (718)648-3642 • E-mail [sales@elcommtech.com](mailto:sales@elcommtech.com)  
<http://www.elcommtech.com>